



Standardzylinderbauteile - Zylinderböden - mit Ölanschluss und Bohrung

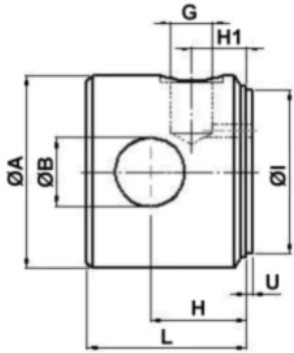

Artikelnr.	ØI mm	ØA mm	ØB mm	U mm	H mm	H1 mm	L mm	G "
WB40mA	40	50	16,2	2	33	18	48	1/4"
WB50mA	50	60	20,25	2	38	20	58	3/8"
WB60mA	60	70	25,25	2	35	20	58	3/8"
WB70mA	70	80	25,25	2	35	20	58	3/8"
WB80mA	80	95	30,25	2	48	26	73	1/2"
WB100mA	100	115	35,25	2	43	30	73	1/2"

Standardzylinderbauteile - Ölanschlüsse - zöllig




Artikelnr.	G "	ØA mm	H mm
092	G1/4	22	16
093	G3/8	26	17
093-10	G3/8	26	10
094	G1/2	30	18
095	G3/4	38	20
096	G1	45	25

für Schlauchbruchsicherung

Artikelnr.	G "	ØA mm	H mm
093-VP-N	G3/8	26	37
094-VP-N	G1/2	30	45


Standardzylinderbauteile - Ölanschlüsse - metrisch



Artikelnr.	G mm	ØA mm	H mm
102.	M6	12	10
10x1	M10x1	18	11
101	M12x1,5	22	16
097	M14x1,5	22	16
098	M16x1,5	26	17

Artikelnr.	G mm	ØA mm	H mm
100	M18x1,5	28	18
100-12	M18x1,5	28	12
104	M20x1,5	30	18
099	M22x1,5	30	18
103	M26x1,5	38	20,5

Standardzylinderbauteile - Ölanschlüsse - axial



Artikelnr.	G "/mm	ØA mm	H mm	H1 mm	L mm	B mm
092-AXIAL	G1/4	8	30	14	25	25
093-AXIAL	G3/8	8	30	15	30	30
094-AXIAL	G1/2	12	40	24,5	35	35
095-AXIAL	G3/4	17	57	35	50	50
110.	M14x1,5	10	40	32	30	30
098-AXIAL	M16x1,5	8	30	17	30	30
100-AXIAL	M18x1,5	8	40	21	35	35

für Schlauchbruchsicherung

Artikelnr.	G "	ØA mm	H mm	H1 mm	L mm	B mm
093-VP-NAXIAL	G3/8	8	63	48	30	30